
## **KB-32**Washout Booth Instructions

## **Whats In The Box:**

В

C

D

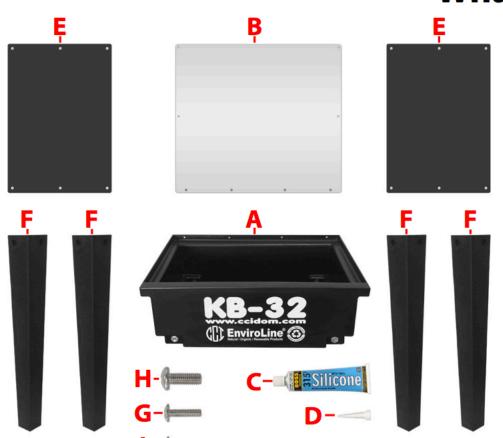

A 1 1 - Sink Pan

1 - Translucent Back panel

1 - Tube of Silicone

1 - Silicone Applicator Tip

2 - Side Panels

F | 4 - Legs

G | 4 - 1/4"-20 x 1" SS Pan Head Bolt

H │ 8 - 3/8"-16 x 1" SS Pan Head Bolt

10 - 1/4"-20 x 3/4" SS Pan Head Bolt




OTake the sink pan and turn it upside down.

Attach one leg at a time using two (H) bolts and a phillips screwdriver.

## (DO NOT OVER TIGHTEN!)

O Repeat the process for the other three legs.







OStand the sink upright on all four legs.


**Tools Required:** 

Phillips Screwdriver

Attach one side panel to the inside of the sink pan using three (I) bolts.

## (DO NOT OVER TIGHTEN!)

- O Note: Threaded inserts on the side panels should face the back of the sink.
- O Repeat the process for the other side panel.

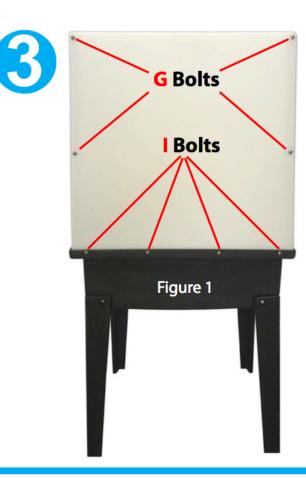



- O Attach the translucent back panel to the bottom of the sink pan using four (I) bolts.

  (DO NOT OVER TIGHTEN!)
- Apply a thin bead of Silicone to the back of both side panels.
   (See Figure 2 marked in Red)
- Attach the translucent back panel to the side panels using four (G) bolts.

(DO NOT OVER TIGHTEN!)



- O Move sink to your desired location.
- Connect drain to 1-1/2" female coupler on sink per city and county regulations.



ORDER TODAY! 415.400.5466 ANTHEMSCREENPRINTING.COM