

Temperature CONTROL

owners manual



Introduction

Congratulations on your purchase of the Workhorse Products Temp Control!

Please inspect the cartons for damage upon receipt. **DO NOT** accept the cartons if damaged is suspected due to improper handling during shipping. Immediately report any damage to the carrier as well as to WORKHORSE PRODUCTS at 800-778-8779.

Inspect the carton contents **IMMEDIATELY** while the carrier is still there. Our packaging has been carefully engineered to endure normal shipping conditions. However, we cannot account for mishandling by the carrier. Upon first sight of freight damage notify or point out to the driver and file your claim with the carrier. Your claim with the carrier will be less difficult to dispute if you notate the damage on the bill of lading. Promptly notify WORKHORSE PRODUCTS.



Questions? Give us a call!

800.778.8779

Visit our website at
workhorseproducts.com



Safety Procedures

WARNING!

RISK OF ELECTRICAL SHOCK! Turn ALL power to unit OFF before service.

All service should be done by or under the supervision of a trained technician



1. For your safety, do not store or use any flammable liquids in the vicinity (at least 3' (1 Meter)) of this appliance.

2. Never place any item other than the stock to be cured or dried under flash element.

3. Never leave the Flash unit unattended when it is operating.



4. Do not perform maintenance on this machine until unit is un-plugged.

5. Never alter the internal wiring of this machine.



THE EXCLAMATION WITHIN AN EQUILATERAL TRIANGLE IS INTENDED TO ALERT THE USER OF IMPORTANT SAFETY PRECAUTIONS SHOP PERSONNEL SHOULD BE AWARE OF DURING OPERATION.



Questions? Give us a call!

800.778.8779

Visit our website at
workhorseproducts.com



Assembly

Place the Temp control on the Super Seca rear mounting rail. Secure the Temp control using the fasteners included in the fastener kit.



The fastener kit consists of:

- (2) 1/4-20 X 3/4 Hex bolts
- (2) 1/4" Lock Washers
- (2) 1/4-20 Hex Nuts



Questions? Give us a call!
800.778.8779
Visit our website at
workhorseproducts.com




Assembly

On / Off Power switch

Temperature Control Knob

Outlet Receptacle

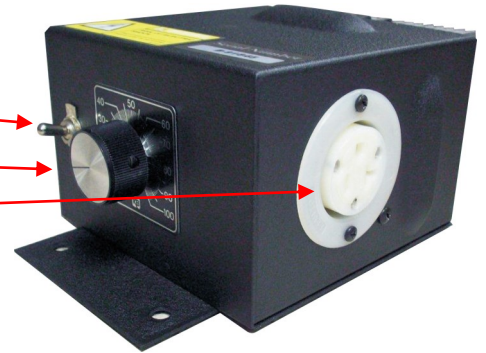

Plug the Super Seca Flash unit into the outlet on the side of the Temp Control.

Plugging the flash into the Temp Control will allow the user to control the temperature of the Super Seca Flash.




Fully loaded Super Seca



Questions? Give us a call!
800.778.8779
Visit our website at
workhorseproducts.com




Power Loop/ Flash Plugs 110V 15amp




NEMA 5-15R NEMA 5-15P

Power Loop/ Flash Plugs 110V 20amp




NEMA 5-20R NEMA 5-20P

Power Loop/ Flash Plugs 220V 15amp




NEMA 6-15R NEMA 6-15P

Power Loop/ Flash Plugs 220V 20amp



NEMA 6-20R NEMA 6-20P

Power Plugs 110/ 220V 30amp (Old Style)



NEMA L5-30R NEMA L5-30P
NEMA L6-30R NEMA L6-30P



Questions? Give us a call!


800.778.8779

Visit our website at
workhorseproducts.com



Wiring Diagram: 115/220V Element.

NOTE: The diagrams for the 115V and 220V models are the same, with variations in the components only. Shown Below with 220V components ; Power Cord, Elements, Light.

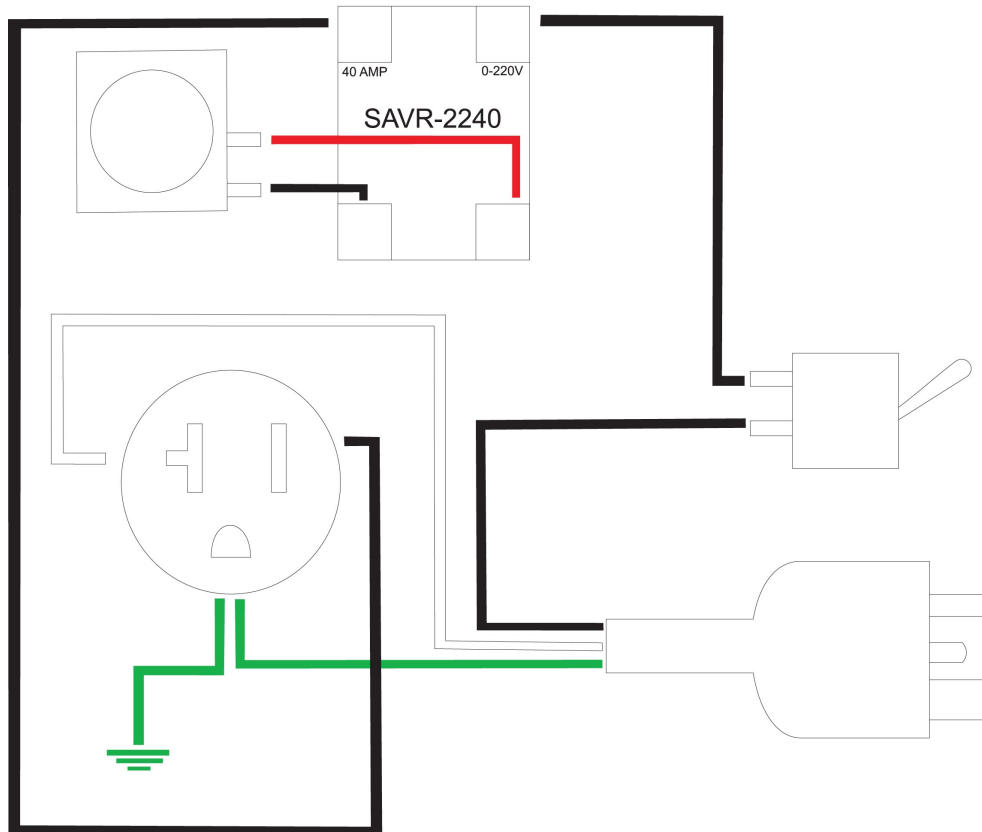

Questions? Give us a call!
800.778.8779
Visit our website at
workhorseproducts.com





Limited Warranty

Although every effort has been made to provide accurate specifications, Workhorse Products does not assume any liability for damages, whether consequential or incidental, that may result from the use or misuse of the indicated specifications. Workhorse Products requires the use of a licensed industrial electrician for the installation of electrical service to equipment requiring electrical power.

Workhorse Products reserves the right to alter specifications in the manufacture of its products. It is understood and agreed that Seller's liability for any equipment whether liability in contract, in tort, under any warranty, in negligence, in strict liability or otherwise shall not exceed the return of the amount of the purchase price paid by Buyer. Notwithstanding the foregoing provision, under no circumstances shall Seller be liable for special, indirect or consequential damages. The price stated for the equipment is a consideration in limiting Seller's liability. No action regardless of form, arising out of the transactions under this Agreement may be brought by Buyer more than one (1) year after the cause of action has occurred. Our warranty is specified is exclusive and no other warranty, whether written or oral, is expressed or implied. Workhorse Products specifically disclaims the implied warranties of merchantability and fitness for a particular purpose. Equipment manufactured or sold by Workhorse Products is warranted against defects in workmanship and materials for a period of one year from receipt by customer. All warranties initiate from date of shipment to original customer. Replacement parts are covered for the term of the equipment warranty period. Parts not under warranty are covered for thirty (30) days from receipt by customer. Any part found by Workhorse Products to be defective in material or workmanship within the stated warranty period will be replaced or repaired at Workhorse's option without charge.

AFTER OBTAINING AN RMA# SEND RETURNED FREIGHT PREPAID TO 3730 E. Southern Avenue, PHOENIX, AZ 85040 USA.

Written authorization must be obtained from Workhorse before any part will be accepted. Replacement parts are sent out freight collect.

Parts sent out prior to receiving defective require a credit card hold for cost plus freight. Upon return of defective part, if it is deemed that the part was not damaged by customer but failed, the cost of the replacement part will be refunded.

Registration Form	
Company Name: _____	Contact Name: _____
Address: _____	Phone Number: _____
_____	Fax Number: _____
City: _____	Email : _____
State: _____	Cell Number: _____
Country: _____	Serial Number: _____
Zip Code: _____	Date Recivied: _____
Model Number: _____	
Date Purchased _____	

Please Fax Registration Form for warranty to take place